G3 A20 / G3 C20 Quick Operation Manual

Button Functions ₼ Home Button: Return to the previous menu or main interface \bigcirc Knob: Start treatment and adjust device settings Start / Stop Button: Start / Stop delivering air Ģ Setting up the Device 1 2 Mask Tube 3 2 4 3 Main Device Power Cord Power Outlet (1): Heated Tubing Port 2: Air Outlet 4 **Power Adapter** 3: DC Inlet (4): Filter Cap (Air Inlet)

A. Connect one end of the tube to the assembled mask.


B. Connect one end of the tube to the air outlet of the device, as shown in the figure above. Connect the heated tube joint to the air outlet of the device, and then insert the power plug into the heated tubing port on the back of the device.

- C. Connect the power adapter to the DC inlet of the main device.
- D. Connect the power cord to the power adapter.
- E. Plug the power cord into the power outlet.

3. Adjusting Device Settings

A. When the device is powered on, the display screen will display the Main Interface, as shown in the left figure below. If the heated tube is connected correctly, the icon $\stackrel{\text{IV}}{\longrightarrow}$ will become a number in the Main Interface on the screen of the device, as shown in the right figure below.

∭ ♦0	ល-		12/09/2	019 15:43
}}}}}}	Accessories	Mask	Report	Settings
CPAP Mode	5.5 Initial P		.O eat P	0 Reslex

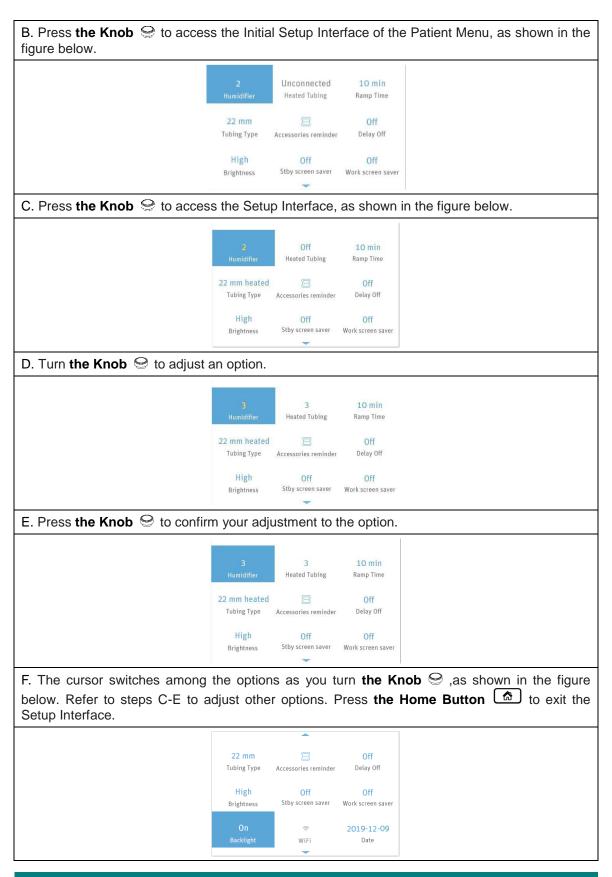

4. Starting Treatment

After you finish adjusting device settings and return to the Main Interface, press **the Start / Stop Button b** to start treatment.